

The best in class performance in P1.95 and P2.6 pixel pitch models.

Suitable for retail, video walls, boardrooms, hospitality and conference centres.



VARIOUS PANEL SIZES

1000 x 500 x 33mm


500 x 500 x 33mm

250 x 500 x 33mm

1000 x 250 x 33mm

500 x 250 x 33mm

250 x 250 x 33mm

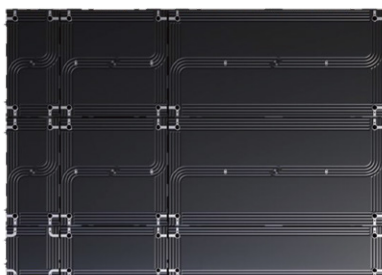


EFFORTLESS MAINTENANCE


Wireless design eliminates messy cables for a stable and easy-to-maintain display.




MULTIPLE INSTALLATION STYLES



Wall-mounted



Ground stacking




Truss rigging

CREATIVE DESIGN

500 x 400mm cabinets support a perfect cube shape.



90° design, seamless right-angle installation.

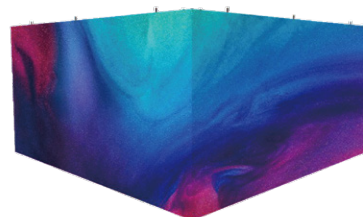

SPECIFICATIONS

MODEL NAME	LDC100019TSFP	LCD100026TFP
Pixel Pitch (mm)	1.95	2.6
Pixel Density (dot/m ²)	262,144	147,456
LED Sealing Type	SMD1212	SMD1515
Module Resolution (PX*PX)	128*128	96*96
Module Size (mm * mm)	250*250	250*250
Module Weight (kg)	0.36	0.33
Module Thickness	3mm	3mm
Pixel Configuration	1R1G1B	1R1G1B
Drive Mode	Constant Current	Constant Current
Horizontal Viewing Angle (Deg)	160	160
Vertical Viewing Angle (Deg)	160	160
Brightness (cd/m ²)	800-1,000	800-1,000
Grey Scale (bit)	14	14
Refresh Rate (Hz)	3,840	3,840
Max Power consumption (W/m ²)	435W $\pm$ 3%/m ²	400 $\pm$ 3%W/m ²
Average Power consumption (W/m ²)	130W/m ²	120W/m ²
Cabinet Size (mm * mm)	1000X500/500X500/250X500 1000X250/500X250/250X250	
Cabinet Weight (Kg)	19KG/m ²	20KG/m ²
Cabinet Thickness (mm)	30	30
Input Voltage (V)	AC100-240V	AC100-240V
Working Temperature (°C)	-20~+50°C	-20~+50°C
Working humidity (RH)	10%~95%RH	10%~95%RH
Storage Temperature (°C)	-30~+60°C	-30~+60°C
Storage humidity (RH)	10%~60%RH	10%~60 %RH
Waterproof Level	IP20	IP20
Working Environment	Indoor	Indoor
Installation Method	Front service	Front service
Certificates	CE EMC A, LVD , FCC, ETL, CB	