



AURORA SIGNAGE

Professional | Captivating | Innovative

3/60 Grove Avenue, Marleston SA 5033
sales@aurorasignage.com.au
www.aurorasignage.com.au

T: 1300 841 542
ABN: 22 620 120 836



AURORA SIGNAGE



Thin Fine Pitch Range
LDC1000xxTFP

INDOOR

P1.95 P2.5 P2.6



More Cabinet size



90° Corner




Ultra Slim



Module with calibration

Various panel size

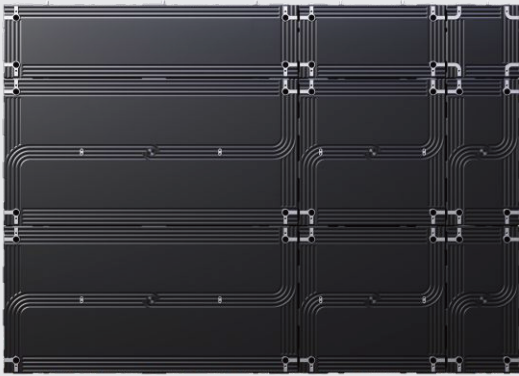

1,000x500mmx33mm

250x500mmx33mm


500x250mmx33mm

500x500mmx33mm

1,000x250mmx33mm

250x250mmx33mm

Multiple installation styles

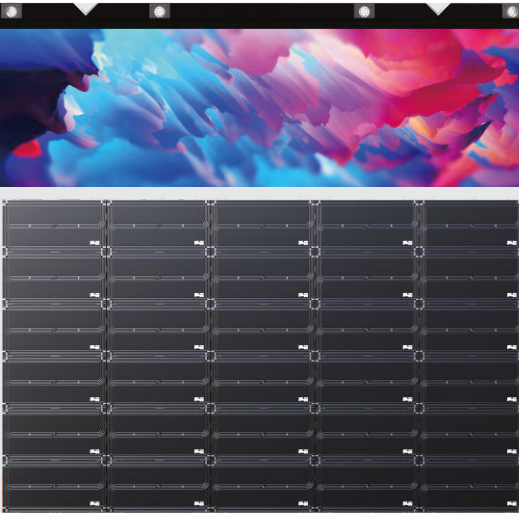

Wall-mounted




Ground stacking



Truss rigging

Creative design

90 degree design, Seamless right-angle installation.

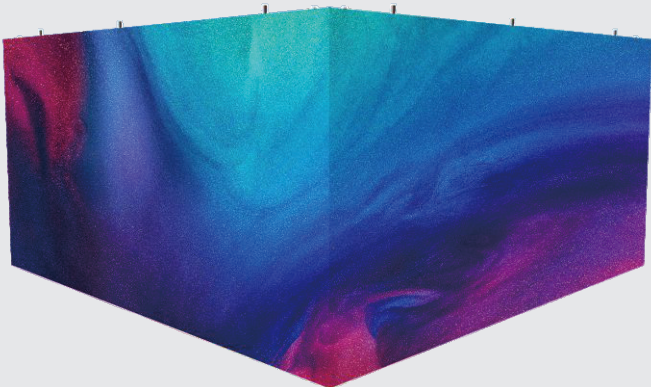

Cube design, 500x500mm cabinets support a perfect cube shape!



Easy for service

All hard connection with cable-free design, very stable!

Easy and fully front maintenance!



Specifications

Model name	LDC100019TFP	LDC100025TFP	LDC100026TFP
Pixel Pitch (mm)	1.95	2.5	2.6
Pixel Density (dot/m ²)	262,144	160,000	147,456
LED sealing Type	SMD1212	SMD1515	SMD1515
Module Resolution (PX* PX)	128*128	100*100	96*96
Module Size (mm * mm)	250*250	250*250	250*250
Module Weight (kg)	0.36	0.33	0.33
Module Thicknees	3mm	3mm	3mm
Pixel configuration	1R1G1B	1R1G1B	1R1G1B
Drive Mode:	Constant Current	Constant Current	Constant Current
Horizontal Viewing Angle (Deg)	160	160	160
Vertical Viewing Angle (Deg)	160	160	160
Brightness (cd/m2)	800-1,000	800-1,000	800-1,000
Grey Scale (bit)	14	14	14
Refresh Rate (Hz)	3,840	3,840	3,840
Max Power consumption(W/m ²)	435W±3%/m ²	400±3%W/m ²	400±3%W/m ²
Average Power consumption (W/m ²)	130W/m ²	120W/m ²	120W/m ²
Cabinet Size (mm * mm)	1000X500/500X500/250X500 1000X250/500X250/250X250	1000X500/500X500/250X500 1000X250/500X250/250X250	1000X500/500X500/250X500 1000X250/500X250/250X250
Cabinet Weight (Kg)	19KG/m ²	20KG/m ²	20KG/m ²
Cabinet Thickness(mm)	30	30	30
Input Voltage (V)	AC100-240V	AC100-240V	AC100-240V
Working Temperature (℃)	-20~+50℃	-20~+50℃	-20~+50℃
Working humidity (RH)	10%~95%RH	10%~95%RH	10%~95%RH
Storage Temperature (℃)	-30~+60℃	-30~+60℃	-30~+60℃
Storage humidity (RH)	10%~60%RH	10%~60%RH	10%~60%RH
Waterproof Level	IP20	IP20	IP20
Working Environment:	Indoor	Indoor	Indoor
Installtion Method	Front service	Front service	Front service
Certificates:	CE)EMC A 、LVD)、FCC、ETL、CB	CE)EMC A 、LVD)、FCC、ETL、CB	CE)EMC A 、LVD)、FCC、ETL、CB