


## Premium Outdoor Fine Pitch Display



## Superior Performance

- Up to 5000nit High Brightness
- Up to 10000:1 High Contrast Ratio
- Up to 7680Hz High Refresh rate
- 16 Bit High Gray Scale
- P66 Waterproof
- 160 Degree Wide Viewing Angle

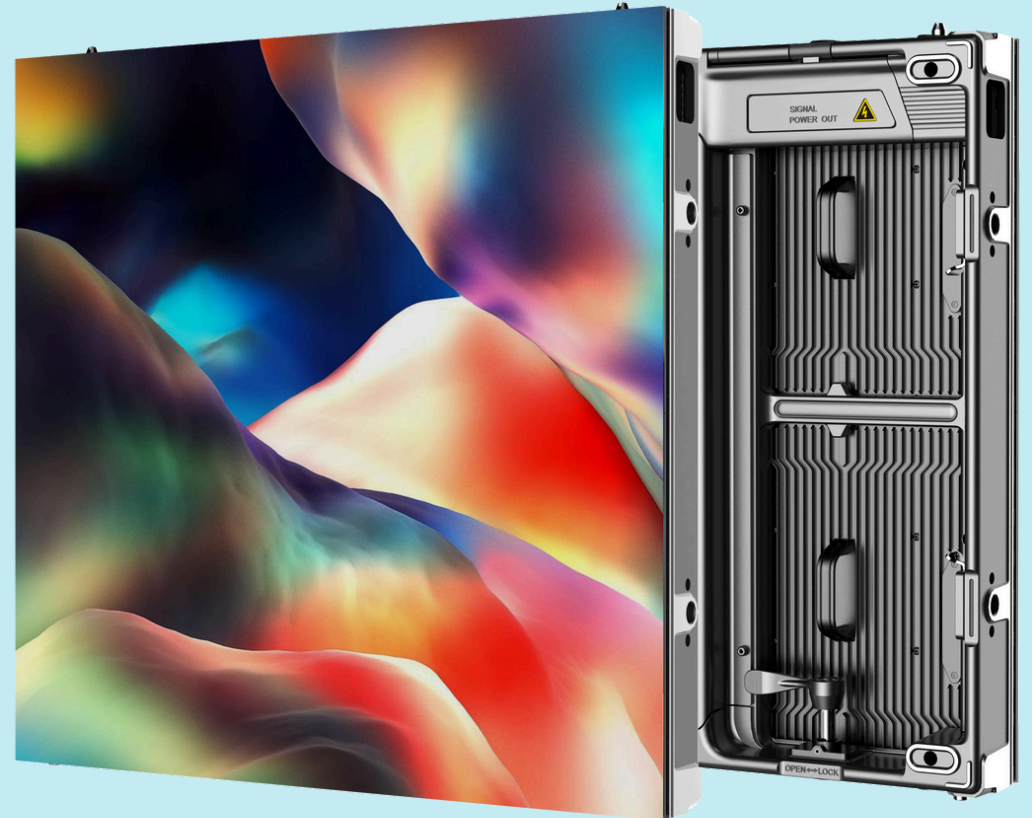


## Advanced Structural Design

- Die-cast aluminum modules and cabinets ensure seamless assembly and effective heat dissipation.
- Supports full front and rear maintenance for hassle-free installation.
- Clean, minimal design with concealed cabling.
- Multiple installation options available: wall-mounted, rigging, or stacked configurations.



Setting a new standard for Fine Pixel performance in Outdoor Displays

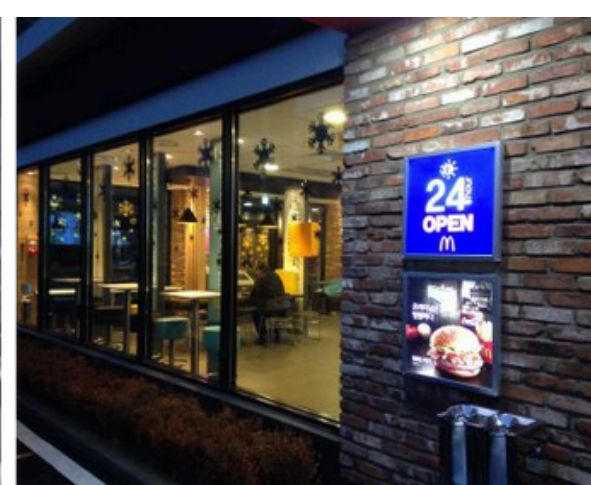



# LDC500XXWPR-V

## SPECIFICATIONS

| Type                               | LDC50019WPR-COB-V      | LDC50026WPR-V |
|------------------------------------|------------------------|---------------|
| LED Type                           | COB                    | SMD1212       |
| Pixel Pitch (mm)                   | 1.9                    | 2.6           |
| Cabinet Resolution (px)            | 256 x 256              | 192 x 192     |
| Cabinet Size (W x H x D mm)        | 500 x 500 x 66         |               |
| Cabinet Weight (kg)                | 9.4                    |               |
| Module Size (mm)                   | 250 x 250              |               |
| Brightness (cd/m²)                 | 3500-4000              | 4000-5000     |
| Contrast                           | 10000:1                | 5000:1        |
| Refresh Rate (Hz)                  | 7680                   | 3840          |
| Gray Scale (bit)                   | 16                     |               |
| Power Consumption Max / Ave (W/m²) | 720 / 216              | 600 / 210     |
| Viewing Angle H / V (deg)          | 160 / 160              |               |
| Cabinet Material                   | Aluminum               |               |
| Maintenance                        | Front and Rear         |               |
| AC Input Voltage (V)               | 100-240                |               |
| Operating Temperature (°C)         | -20 ~ 50               | -30 ~ 50      |
| IP Rating                          | IP66                   |               |
| Certificates                       | CE, ETI, FCC, EMC, PSE |               |

\*All data provided are from factory lab and are subject to change without prior notice.



# LDC500XXWPR-V

## CABINET DIAGRAM

