
All-In-One Foldable LED TV Display








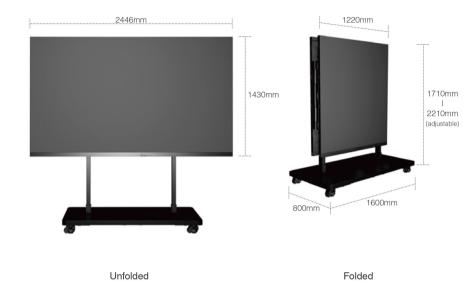


All-In-One LED TV Display series products can be widely used in classrooms, conference rooms, multi-functional halls, banks, hotels, shopping malls, entertainment and other places to efficiently delivery contents.

SPECIFICATIONS	1270	1588	1906	2541
Pixel Pitch(mm)	1.2	1.5	1.9	2.5
LED Type	SMD	SMD	SMD	SMD
Brightness(cd/m²)	100~550	100~550	100~550	100~550
Refresh Rate(Hz)	1920/3840	1920/3840	1920/3840	1920/3840
Power Consumption(Max/Ave) (W/display)	1920/670	1920/670	1360/470	1440/500
Panel Resolution(px)	480×270	384×216	320×180	240×135
Panel Size(mm)	610×343×38.5	610×343×38.5	610×343×38.5	610×343×38.5
Overall Resolution(px)	1920×1080	1536×864	1280×720	960×540
Overall Display Size(mm)	2440×1372.5	2440×1372.5	2440×1372.5	2440×1372.5
Overall Dimension(mm)	2446×1430	2446×1430	2446×1430	2446×1430
Weight(kg)	230	230	230	230
IP Rating	IP30	IP30	IP30	IP30
Input voltage(V)	AC100-240V 50/60Hz	AC100-240V 50/60Hz	AC100-240V 50/60Hz	AC100-240V 50/60Hz
Maintenance	Front	Front	Front	Front
Operating Temperature/Humidity(°C/RH)	-10~40/10~85%	-10~40/10~85%	-10~40/10~85%	-10~40/10~85%


· Foldable transportation, electric lift, easy installation, plug and play.



 Initiate three-in-one integrated design of power supply, bridge board and receiving card to reduce electromagnetic interference.



· Remote control with interfaces adapting USB, HDMI and etc.



 All-in-One with slim body and light weight modular design to save your space and make your boardroom brilliant.



· Ultra-large viewing angle plus 8 brightness levels, easy to adjust brightness according to the environments.



· Integrated with external device, wireless screen transmission via PC, mobile phone and tablet, instant interaction at any moment.

